

GRUPPI DI PRESSURIZZAZIONE A FUNZIONAMENTO AUTOMATICO AUTOMATIC WORKING PRESSURE SYSTEMS

LIMITI D'IMPIEGO

- Temperatura liquido fino a 35°C
- Temperatura ambiente fino a 40°C
- Altezza d'aspirazione manometrica fino a 8 mt.
- Pressostato pre-tarato 1,4÷2,8 bar
- Pressostato pre-tarato 1,6÷3,2 bar (AGC 1100/25)
- Servizio continuo

MOTORE

- Motore elettrico ad induzione a 2 poli ($n = 2850 \text{ min}^{-1}$)
- Isolamento Classe F
- Protezione IP 44

COMPONENTI

- Serbatoio a membrana
- Tubo flessibile raccordato
- Pressostato con cavi pre-tarato
- Manometro
- Raccordo ottone

OPERATING CONDITIONS


- Liquid temperature up to 35°C
- Ambient temperature up to 40°C
- Total suction lift up to 8 mt.
- Adjusted switch on/off pressure 1,4÷2,8 bar
- Adjusted switch on/off pressure 1,6÷3,2 bar (AGC 1100/25)
- Continuous duty

MOTOR

- Two-Pole induction motor ($n = 2850 \text{ min}^{-1}$)
- Insulation Class F
- Protection IP 44

COMPONENTS

- Membrane tank
- Flexible hose with connection
- Pre-set pressure switch with cable
- Pressure gauge
- Brass connection

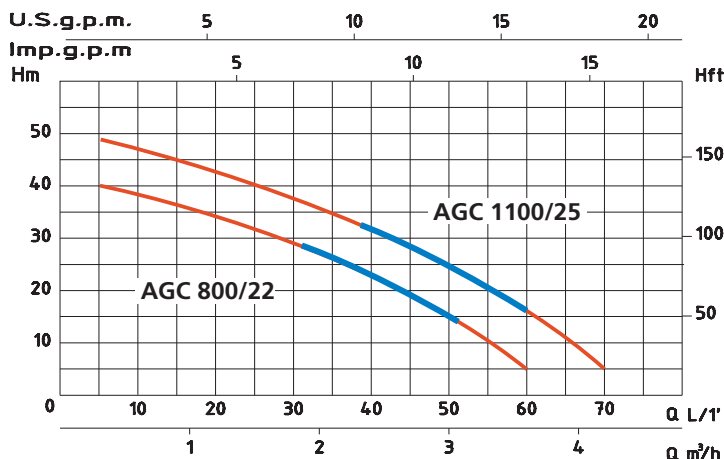

TIPO - TYPE	AGC 800/22	AGC 1100/25
P2	0,8 HP	1 HP
Voltage	230 V	230 V
Frequency	50 Hz	50 Hz
Ampere	3,8 A	5 A
Q max.	60 l/1'	70 l/1'
H max.	40 m	48 m
Dnm - Dna	1"-1"	1"-1"