

ELETTROPOMPA SOMMERSA MULTISTADIO MULTISTAGE SUBMERSIBLE PUMP

LIMITI D'IMPIEGO

- Temperatura liquido fino a 35° C
- Profondità immersione 10 mt.
- Partenza/ora 30 max.
- Passaggio solidi \varnothing 3 mm
- Livello min. d'aspirazione 60 mm

MOTORE

- Motore elettrico ad induzione a 2 poli (n = 2850 min-1)
- Protezione amperometrica a riarmo automatico incorporata
- Isolamento Classe F
- Protezione IP 68

MATERIALI

- Corpo pompa Acciaio Inox
- Griglia Noryl
- Girante e diffusori Noryl
- Supporti Alluminio
- Albero Acciaio Inox
- Corpo motore Alluminio
- Doppia tenuta meccanica

OPERATING CONDITIONS


- Liquid temperature up to 35°C
- Submersion depth 10m
- Start/hour 30 max
- Grain size inlet \varnothing 3 mm
- Min. suction level 60 mm

MOTOR

- Two-Pole induction motor (n = 2850 min-1)
- Built-in over load motor protector with automatic reset
- Insulation Class F
- Protection IP 68

MATERIALS

- External pump body Stainless Steel
- Suction strainer Noryl
- Impeller and diffusors Noryl
- Bearing brackets Aluminium
- Shaft Stainless Steel
- Motor housing Aluminium
- Double mechanical seal

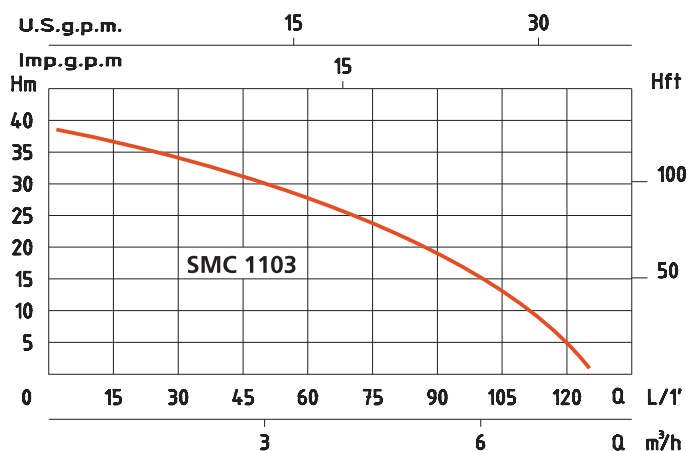

TIPO - TYPE	SMC 1103
P1	1100 W
Voltage	230 V
Frequency	50 Hz
Ampere	5 A
Q max.	130 l/1'
H max.	38 m
Dnm	1"