

# ELETTROPOMPE SOMMERSE INOX PER ACQUE CARICHE STAINLESS STEEL SUBMERSIBLE PUMPS FOR DIRTY WATER



## LIMITI D'IMPIEGO

- Temperatura liquido fino a 35° C
- Profondità d'immersione 5 mt.
- Passaggio solidi Ø 40 mm
- Livello min. d'aspirazione 65 mm

## MOTORE

- Motore elettrico ad induzione a 2 poli
- Motoprotettore incorporato
- Condensatore permanente inserito
- Isolamento Classe F
- Protezione IP 68

## MATERIALI

- Maniglia Polipropilene
- Corpo pompa Acciaio Inox
- Girante Ghisa
- Cassa motore Acciaio Inox
- Albero motore Acciaio Inox
- Tenuta meccanica Ceramica/Grafite

## OPERATING CONDITIONS


- Liquid temperature up to 35°C
- Submersion depth 5 mt.
- Grain size inlet Ø 40 mm
- Min. suction level 65 mm

## MOTOR

- 2 pole induction motor
- Incorporated motorprotector
- Permanent split capacitor
- Insulation Class F
- Protection IP 68

## MATERIALS

- Handle Moplen
- Pump body Stainless Steel
- Impeller Cast Iron
- Motor casing Stainless Steel
- Shaft with rotor Stainless Steel
- Mechanical seal Ceramic/Graphite

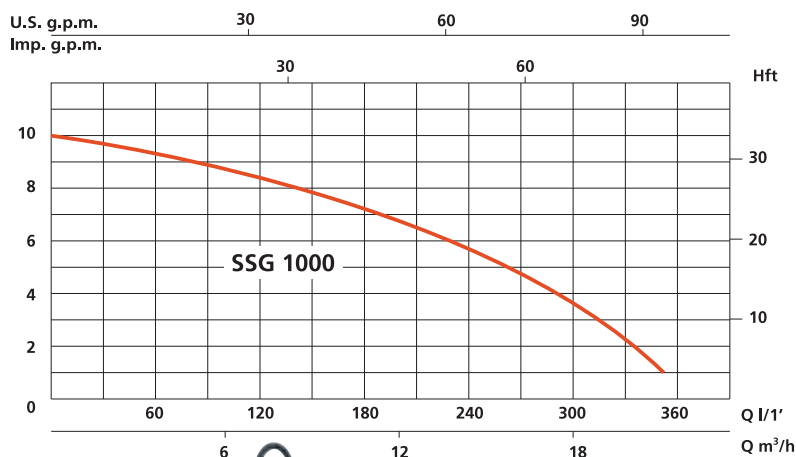

TIPO - TYPE	SSG 1000
P1	1400 W
Voltage	230 V
Frequency	50 Hz
Ampere	6,5 A
Q max.	350 l/1'
H max.	10 m
Dnm	2"