

ELETTROPOMPE SOMMERSE PER ACQUE CARICHE SUBMERSIBLE PUMPS FOR DIRTY WATER

LIMITI D'IMPIEGO

- Temperatura liquido fino a 40° C
- Profondità d'immersione 5 mt.
- Passaggio solidi Ø 20 mm (SVS 350/S)
- Passaggio solidi Ø 30 mm (SVS 600/S)

MOTORE

- Motore elettrico ad induzione a 2 poli ($n = 2850 \text{ min}^{-1}$)
- Camera d'olio per lubrificazione tenuta
- Isolamento Classe F
- Protezione IP 68
- Condensatore permanentemente inserito
- Motoprotettore termico incorporato
- Completo di 10m di cavo

MATERIALI

- | | |
|--------------------|----------------------------------|
| - Cassa motore | Acciaio Inox |
| - Corpo pompa | Ghisa |
| - Coperchio motore | Ghisa |
| - Girante | Ghisa |
| - Albero motore | Acciaio Inox |
| - Tenuta meccanica | Acciaio Inox
Ceramica/Carbone |

OPERATING CONDITIONS


- Liquid temperature up to 40°C
- Submersion depth 5 mt.
- Grain size inlet Ø 20 mm (SVS 350/S)
- Grain size inlet Ø 30 mm (SVS 600/S)

MOTOR

- Two-Pole induction motor ($n = 2850 \text{ min}^{-1}$)
- Oil chamber for seal lubrication
- Insulation Class F
- Protection IP 68
- Built-in capacitor
- Overload protection
- Complete with 10 m cable

MATERIALS

- | | |
|--------------------|-----------------------------------|
| - Motor casing | Stainless Steel |
| - Pump body | Cast Iron |
| - Pump casing | Cast Iron |
| - Impeller | Cast Iron |
| - Shaft with rotor | Stainless Steel |
| - Mechanical seal | Stainless Steel
Carbon/Ceramic |

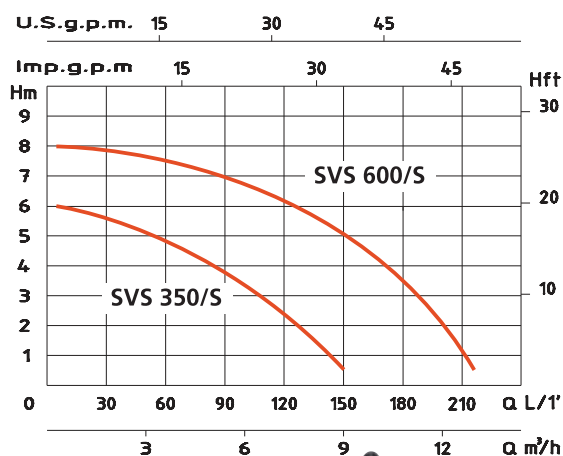

TIPO - TYPE	SVS 350/S	SVS 600/S
P1	350 W	600 W
Voltage	230 V	230 V
Frequency	50 Hz	50 Hz
Ampere	1,65 A	3,2 A
Q max.	150 l/1'	220 l/1'
H max.	6 m	8 m
Dnm - Dna	1"1/4	2"