



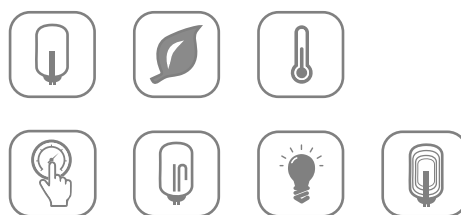

SE

50/80/100/120/
150/200

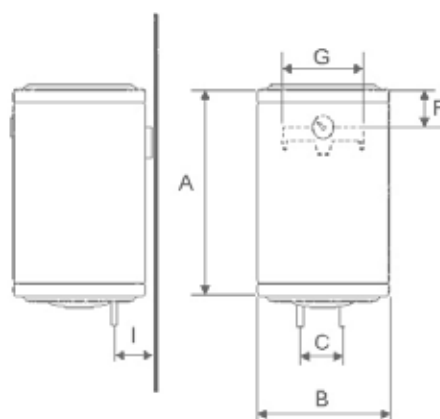

Available with
outer regulation
of temperature

Model	A mm	B mm	C mm	F mm	G mm	I mm
SE 50	510	460	100	130	350	130
SE 80	700	460	100	130	350	130
SE 100	805	460	100	130	350	130
SE 120	1000	460	100	130	350	130
SE 150	935	550	140	180	350	130
SE 200	1105	550	140	180	350	130

Model	Thermal Dispersion 65° (Kwh/24h)	Power Watts*	Voltage Volts	Heating Time dt 50°C	Max Temperature C°	Max Pressure (bar)	Humidity Protection	Class Insul.	Profile	Energy Class
SE 50	0,98	1200	230	170'	75	8	IPX4	I	M	C
SE 80	1,32	1200	230	260'	75	8	IPX4	I	M	C
SE 100	1,51	1500	230	245'	75	8	IPX4	I	M	C
SE 120	1,84	1500	230	315'	75	8	IPX4	I	L	C
SE 150	2,09	2000	230	416'	75	8	IPX4	I	XL	C
SE 200	2,41	2000	230	499'	75	8	IPX4	I	XL	C

*Power of the heating element is optional for the customers; they can use 1200-1500-2000 Watts.