



B14

Electric storage water heater 14lt, "Doccetta"

Why to choose it:

- High versatility of installation, even into not-on-sight furniture
- Small dimensions require short period to heat water
- Double outlet to connect in various points for serving hot water
- Kit of mixer and shower hoes included
- Mixer to regulate the water's flow

TECHNICAL DATA

B14

Thermal Dispersiom 50° (KWh/24h)	0.52
Power (W)	2000
Voltage (V)	230
Heating time (Δt 50°)	26'
Max working temperature (C°)	65°
Max working pressure (bar)	8
Protection against humidity	IPX4
Insulation class	I
Profile	XXS
Energy Class	В

- DOUBLE OUTLET FOR
 CONNECTION TO SEVERAL HOT
 WATER DELIVERY POINTS
- KIT OF MIXER, HOSE AND SHOWER ARM AS STANDARD
- SINGLE LEVER MIXER TO REGULATE THE WATER FLOW
- ABSENCE OF CFC;
 POLYURETHANE FOAM
 FOR ECOLOGICAL THERMAL
 INSULATION



COPPER HEATING ELEMENT

LED CONTROL



ERP 2017

ROHS COMPONENT



INSTALLATION KIT




EXTERNAL REGULATION OF TEMPERATURE





MAGNESIUM ANODE



DIMENSIONS

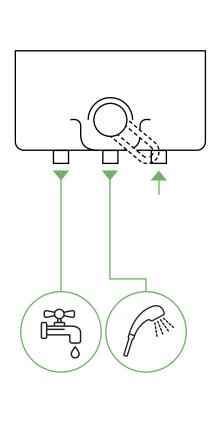

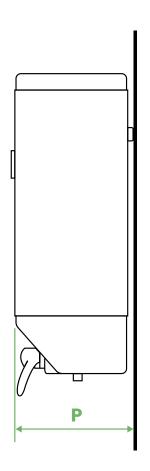

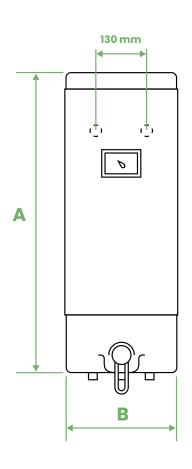

	Α	В	P
B14	640 mm	230 mm	220 mm