

C65

SMART C65

Electric storage water heater, double tank, Flat profile.

Available for vertical installation / horizontal (left), wall fixed.

+ Why to choose it:

- This product meets the needs of a space saving installation, optimizing spaces
- SMART thermostat controls one of the 2 tanks and optimizes energy consumptions
- The double tanks systems can give you hot water in half of the required standard time of normal storage water heater.



TECHNICAL DATA

	C65 SMART	C65 SMART
Thermal Dispersiom 50° (KWh/24h)	0,42	0,42
Power (W)	2x800	2x1200
Voltage (V)	230	230
Heating time (Δt 50°)	120'	80'
Max working temperature (C°)	65°	65°
Max working pressure (bar)	8	8
Protection against humidity	IPX4	IPX4
Insulation class	I	I
Profile	M	M
Energy Class	C	C



THERMOSTAT WITH SMART TECHNOLOGY TO MEMORIZE THE DAILY USE OF HOT WATER. PROGRAM THE OPTIMAL CONSUMPTION TO REDUCE ENERGY WASTE




FLAT DESIGN TO REDUCE THE OVERALL DIMENSIONS AND GUARANTEE A SPACE-SAVING INSTALLATION



ALSO POSSIBLE HORIZONTAL INSTALLATION (SX), TO ADAPT TO THE TIGHTEST SPACES!



COPPER HEATING ELEMENT



ERP 2017



INSTALLATION KIT



EXTERNAL REGULATION OF TEMPERATURE



MAGNESIUM ANODE



ROHS COMPONENT



POLYURETHANE FOAM CFC FREE




THERMOSTAT



ENVIRONMENT RESPECT

DIMENSIONI

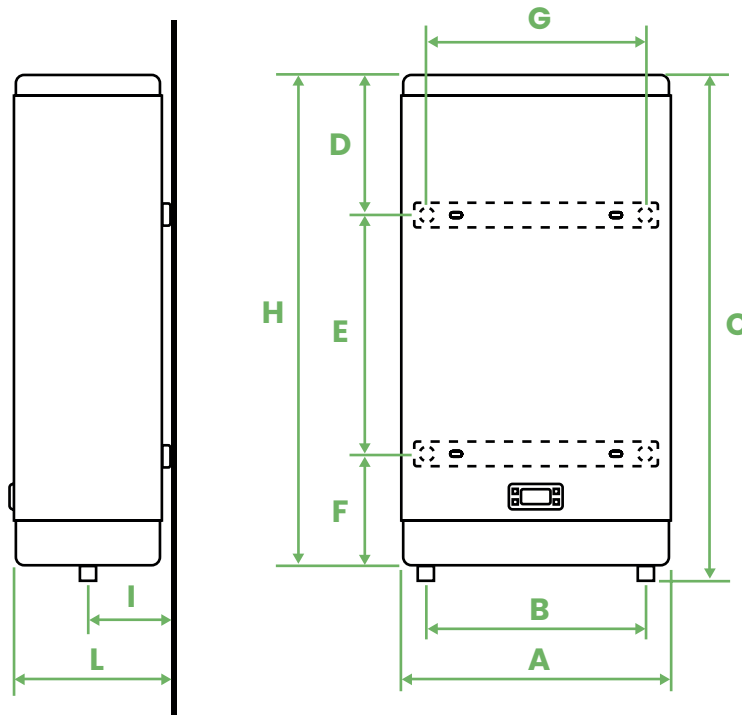

	A	B	C	D	E	F	G	H	I	L
C65 SMART	470 mm	400 mm	855 mm	225 mm	420 mm	210 mm	380 mm	875 mm	145 mm	275 mm
C65 SMART	470 mm	400 mm	855 mm	225 mm	420 mm	210 mm	380 mm	875 mm	145 mm	275 mm