

# ECO XL

60 / 80 *lt*

Electric storage water heater with augmented thermal insulation

## + Why to choose it:

The augmented thickness of the insulation (compared to classic models), makes this water heater the best answer to the new low consumption needs. The bigger "thermal coat" effect allows the water to be kept in temperature for a longer period of time long, giving off much less heat than to classic models.

This new product class guarantees the perfect combination of the needs of a lower energy consumption and the comfort of the hot water.










Augmented dimensions to increase even more the ECO comfort!




## TECHNICAL DATA

	ECO XL 60	ECO XL 80
<b>Thermal Dispersiom 50° (KWh/24h)</b>	0,79	0,97
<b>Power (W)</b>	1200	1200
<b>Voltage (V)</b>	230	230
<b>Heating time (Δt 50°)</b>	145'	232'
<b>Max working temperature (C°)</b>	65°	65°
<b>Max working pressure (bar)</b>	8	8
<b>Protection against humidity</b>	IPX4	IPX4
<b>Insulation class</b>	I	I
<b>Profile</b>	M	M
<b>Energy Class</b>	C	C

- +** LESS THERMAL DISPERSION
- +** ENHANCED THICKNESS
- +** ENERGY COST SAVING
- +** ABSENCE OF CFC;  
POLYURETHANE FOAM  
FOR ECOLOGICAL THERMAL  
INSULATION

 COPPER HEATING ELEMENT	 THERMOSTAT	 LED CONTROL	 ROHS COMPONENT
 MAGNESIUM ANODE	 POLYURETHANE FOAM CFC FREE	 SMOKE CONTROL	 ENVIRONMENT RESPECT
 ERP 2017			

## DIMENSIONS

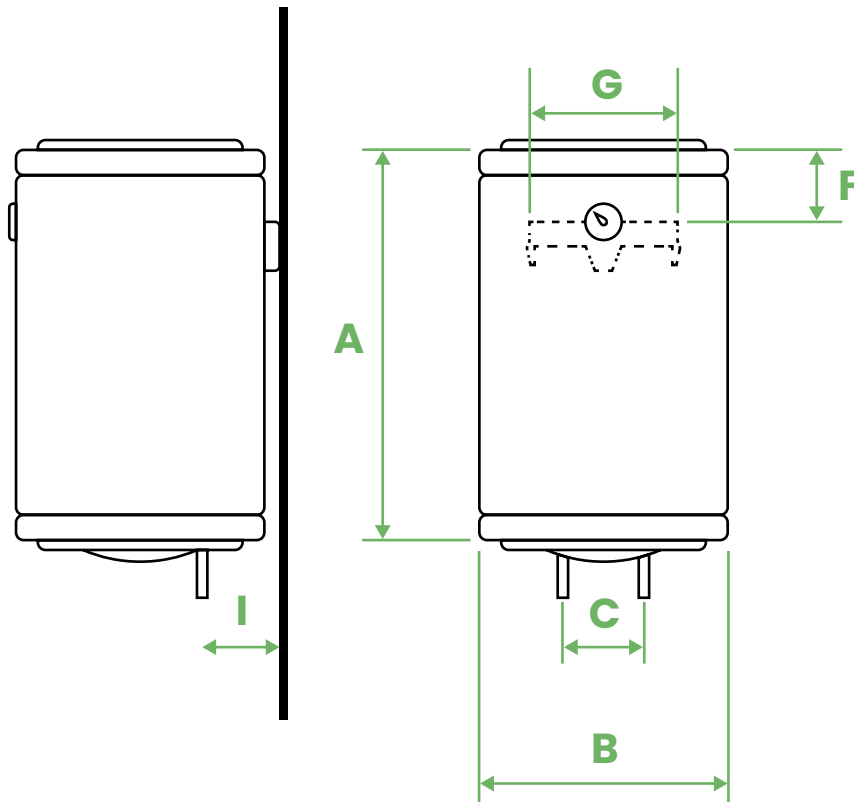

	A	B	C	F	G	I
<b>ECO XL 60</b>	510 mm	500 mm	100 mm	130 mm	350 mm	130 mm
<b>ECO XL 80</b>	640 mm	500 mm	100 mm	130 mm	350 mm	130 mm