

Electromechanical control panels

BASIC 1 AVC RANGE 0,5÷3HP

Direct starting electromechanical control panel 1 motor with capacitor, voltmeter, ammeter and contactor

GENERAL SPECIFICATIONS

- Operating voltage 230Vac $\pm 10\%$ 50/60Hz
- Commutator for the automatic -0- manual operation (stable)
- Running light
- Analog ammeter 72x72
- Analog voltmeter 72x72
- Running capacitor
- Contactor
- Thermal circuit breaker (external reset)
- Connection terminal board
- External thermoplastic box
- Cable glands
- Protection degree IP55
- Operating temperature -5/+40°C

INPUTS / OUTPUTS

- Input for pressure switch or float switch

PROTECTIONS

- Maximum current protection



SINGLE-PHASE 230Vac $\pm 10\%$ 50/60Hz

CODE	TYPE	POWER		PROTEZIONE TERMICA [A]	CONDENSATORE	DIMENSIONS mm			WEIGHT Kg	BOX
		kW	Hp			A-H	L-W	P-D		
SA611.04/16L	BASIC 1 AVC 230 0,5	0,37	0,5	4	16 μ F	285	245	140	2,4	03
SA611.04/20L	BASIC 1 AVC 230 0,5	0,37	0,5	4	20 μ F	285	245	140	2,5	03
SA611.06/20L	BASIC 1 AVC 230 0,75	0,55	0,75	6	20 μ F	285	245	140	2,5	03
SA611.06/25L	BASIC 1 AVC 230 0,75	0,55	0,75	6	25 μ F	285	245	140	2,5	03
SA611.07/30L	BASIC 1 AVC 230 1	0,75	1	7	30 μ F	285	245	140	2,5	03
SA611.07/35L	BASIC 1 AVC 230 1	0,75	1	7	35 μ F	285	245	140	2,5	03
SA611.10/40L	BASIC 1 AVC 230 1,5	1,1	1,5	10	40 μ F	285	245	140	2,5	03
SA611.13/50L	BASIC 1 AVC 230 2	1,5	2	13	50 μ F	285	245	140	2,6	03
SA611.13/60L	BASIC 1 AVC 230 2	1,5	2	13	60 μ F	285	245	140	2,6	03
SA611.15/60L	BASIC 1 AVC 230 2	1,5	2	15	60 μ F	285	245	140	2,6	03
SA611.18/70L	BASIC 1 AVC 230 3	2,2	3	18	70 μ F	285	245	140	2,6	03
SA611.18/80L	BASIC 1 AVC 230 3	2,2	3	18	80 μ F	285	245	140	2,7	03


OPTIONALS

CODE	TYPE
OP100.02/0	Automatic -0- manual selector switch (from stable to unstable)
OP100.03/00	Wired circuit breaker for capacitor up to 100 μ F
OP100.03/16	Wired capacitor 16 μ F
OP100.03/20	Wired capacitor 20 μ F
OP100.03/25	Wired capacitor 25 μ F
OP100.03/30	Wired capacitor 30 μ F
OP100.03/35	Wired capacitor 35 μ F
OP100.03/40	Wired capacitor 40 μ F
OP100.03/50	Wired capacitor 50 μ F
OP100.03/60	Wired capacitor 60 μ F
OP100.03/70	Wired capacitor 70 μ F
OP100.03/80	Wired capacitor 80 μ F

OP00.10

Couple of brackets for collar (reference BOX 03-04)

COMMON USE

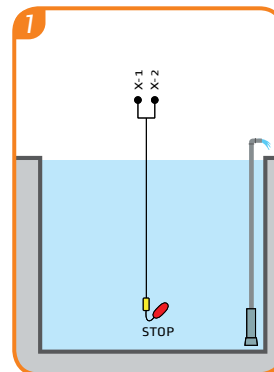

COMPONENTS KEY

 Float switch for clean water