

## Electromechanical control panels

# BASIC 1 AVC RANGE 0,5÷3HP

Direct starting electromechanical control panel 1 motor with capacitor, voltmeter, ammeter and contactor

### GENERAL SPECIFICATIONS

- Operating voltage 230Vac ±10% 50/60Hz
- Commutator for the automatic -0- manual operation (stable)
- Running light
- Analog ammeter 72x72
- Analog voltmeter 72x72
- Running capacitor
- Contactor
- Thermal circuit breaker (external reset)
- Connection terminal board
- External thermoplastic box
- Cable glands
- Protection degree IP55
- Operating temperature -5/+40°C

### INPUTS / OUTPUTS

- Input for pressure switch or float switch

### PROTECTIONS

- Maximum current protection



#### SINGLE-PHASE 230Vac ±10% 50/60Hz


CODE	TYPE	POWER		PROTEZIONE TERMICA [A]	CONDENSATORE	DIMENSIONS mm			WEIGHT Kg	BOX
		kW	Hp			A-H	L-W	P-D		
SA611.04/16L	BASIC 1 AVC 230 0,5	0,37	0,5	4	16µF	285	245	140	2,4	03
SA611.04/20L	BASIC 1 AVC 230 0,5	0,37	0,5	4	20µF	285	245	140	2,5	03
SA611.06/20L	BASIC 1 AVC 230 0,75	0,55	0,75	6	20µF	285	245	140	2,5	03
SA611.06/25L	BASIC 1 AVC 230 0,75	0,55	0,75	6	25µF	285	245	140	2,5	03
SA611.07/30L	BASIC 1 AVC 230 1	0,75	1	7	30µF	285	245	140	2,5	03
SA611.07/35L	BASIC 1 AVC 230 1	0,75	1	7	35µF	285	245	140	2,5	03
SA611.10/40L	BASIC 1 AVC 230 1,5	1,1	1,5	10	40µF	285	245	140	2,5	03
SA611.13/50L	BASIC 1 AVC 230 2	1,5	2	13	50µF	285	245	140	2,6	03
SA611.13/60L	BASIC 1 AVC 230 2	1,5	2	13	60µF	285	245	140	2,6	03
SA611.15/60L	BASIC 1 AVC 230 2	1,5	2	15	60µF	285	245	140	2,6	03
SA611.18/70L	BASIC 1 AVC 230 3	2,2	3	18	70µF	285	245	140	2,6	03
SA611.18/80L	BASIC 1 AVC 230 3	2,2	3	18	80µF	285	245	140	2,7	03

#### OPTIONALS

CODE	TYPE
OP100.02/0	Automatic -0- manual selector switch (from stable to unstable)
OP100.03/00	Wired circuit breaker for capacitor up to 100µF
OP100.03/16	Wired capacitor 16µF
OP100.03/20	Wired capacitor 20µF
OP100.03/25	Wired capacitor 25µF
OP100.03/30	Wired capacitor 30µF
OP100.03/35	Wired capacitor 35µF
OP100.03/40	Wired capacitor 40µF
OP100.03/50	Wired capacitor 50µF
OP100.03/60	Wired capacitor 60µF
OP100.03/70	Wired capacitor 70µF
OP100.03/80	Wired capacitor 80µF

OP00.10 Couple of brackets for collar (reference BOX 03-04)

#### COMMON USE

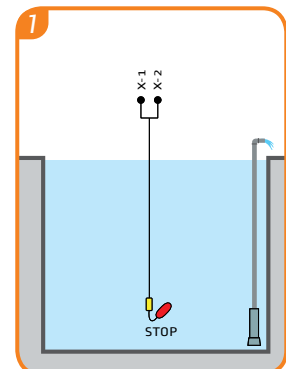

#### COMPONENTS KEY

 Float switch for clean water