

## Electromechanical control panels

# BASIC 1 CC AV RANGE 0,5÷3HP

**Direct starting electromechanical control panel 1 motor with capacitor, voltmeter, ammeter and cam commutator**

### GENERAL SPECIFICATIONS

- Operating voltage 230Vac ±10% 50/60Hz
- Commutator for the automatic -0- manual operation
- Running light
- Analog ammeter 72x72
- Analog voltmeter 72x72
- Running capacitor
- Thermal circuit breaker (external reset)
- Connection terminal board
- External thermoplastic box
- Cable glands
- Protection degree IP55
- Operating temperature -5/+40°C

### INPUTS / OUTPUTS

- Input for pressure switch or float switch

### PROTECTIONS

- Maximum current protection




#### SINGLE-PHASE 230Vac ±10% 50/60Hz

CODE	TYPE	POWER		PROTEZIONE TERMICA [A]	CONDENSATORE	DIMENSIONS mm			WEIGHT Kg	BOX
		kW	Hp			A-H	L-W	P-D		
SA603.04/16	BASIC 1 CC AV 230 0,5	0,37	0,5	4	16µF	285	245	140	2,1	03
SA603.04/20	BASIC 1 CC AV 230 0,5	0,37	0,5	4	20µF	285	245	140	2,2	03
SA603.06/20	BASIC 1 CC AV 230 0,75	0,55	0,75	6	20µF	285	245	140	2,2	03
SA603.06/25	BASIC 1 CC AV 230 0,75	0,55	0,75	6	25µF	285	245	140	2,2	03
SA603.07/30	BASIC 1 CC AV 230 1	0,75	1	7	30µF	285	245	140	2,2	03
SA603.07/35	BASIC 1 CC AV 230 1	0,75	1	7	35µF	285	245	140	2,2	03
SA603.10/40	BASIC 1 CC AV 230 1,5	1,1	1,5	10	40µF	285	245	140	2,2	03
SA603.13/50	BASIC 1 CC AV 230 2	1,5	2	13	50µF	285	245	140	2,3	03
SA603.13/60	BASIC 1 CC AV 230 2	1,5	2	13	60µF	285	245	140	2,3	03
SA603.15/60	BASIC 1 CC AV 230 2	1,5	2	15	60µF	285	245	140	2,3	03
SA603.18/70	BASIC 1 CC AV 230 3	2,2	3	18	70µF	285	245	140	2,3	03
SA603.18/80	BASIC 1 CC AV 230 3	2,2	3	18	80µF	285	245	140	2,4	03

#### OPTIONALS

CODE	TYPE
OP100.03/00	Wired circuit breaker for capacitor up to 100µF
OP100.03/16	Wired capacitor 16µF
OP100.03/20	Wired capacitor 20µF
OP100.03/25	Wired capacitor 25µF
OP100.03/30	Wired capacitor 30µF
OP100.03/35	Wired capacitor 35µF
OP100.03/40	Wired capacitor 40µF
OP100.03/50	Wired capacitor 50µF
OP100.03/60	Wired capacitor 60µF
OP100.03/70	Wired capacitor 70µF
OP100.03/80	Wired capacitor 80µF
OP00.10	Couple of brackets for collar (reference BOX 03-04)

#### COMMON USE

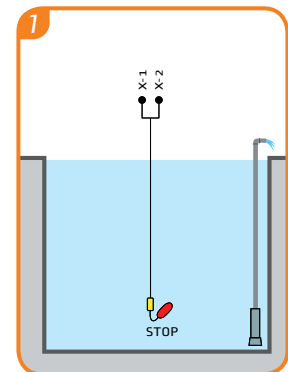

#### COMPONENTS KEY

 Float switch for clean water