

Electronic control panels

RAIN PLUS 2 RANGE 0,5÷20HP

Direct starting electronic control panel 2 motors for first rain collection system with display

- Motor's data auto learning
- Events and alarms data logger
- Remote control
- Single-phase version equipped with power relay for inductive loads (up to 31A)
- Motherboard protection



GENERAL SPECIFICATIONS

- Operating voltage 230Vac +15/-20% 50/60Hz (SA692.xx)
- Operating voltage 400Vac +15/-20% 50/60Hz (SA695.xx)
- General disconnecting switch with door lock
- Button for automatic operation
- Button for manual operation (stable/unstable)
- Auxiliary circuit protection fuse
- Motors' protection fuse
- N°2 contactors (SA695.xx)
- External thermoplastic box
- Cable glands
- Protection degree IP65
- Operating temperature -5/+50°C
- Relative humidity 60% at 50°C (not condensed)

ADVANTAGES

- Multilingual Display LCD to visualize:
 - Operating voltage
 - Current for each motor
 - Hour counter for each motor
 - Level status
 - All information concerning the operation of the motors
- Maximum and minimum motor current auto learning
- Dry running with level control and minimum current
- Adjustable probe sensitivity
- Waiting for motor start-up adjustable by decanting
- Deactivable alternance of the 2 motors
- 3s delay between the starting of the 2 motors
- Automating switching in case of motor failure
- Adjustable supply mains waiting
- Operation with float switches and probes

INPUTS / OUTPUTS

- N°3 very low voltage inputs for float switches or probes (minimum/maximum1/maximum2)
- Very low voltage input for rain sensor
- N°2 very low voltage input for motor klixon
- Alarms output 12Vdc max 200mA for rain sensor
- Alarms output 12Vdc max 200mA for flashing LED
- Alarms output max 5A NC-COM-NO (pure contact)

PROTECTIONS

- Maximum and minimum current protection for each motor with alarm
- Lack and sequence of phases protection with automatic reset and alarm
- Minimum and maximum voltage protection with automatic reset and alarm
- Klixon protection for each motor with automatic reset and alarm

SINGLE-PHASE 230Vac +15/-20% 50/60Hz

CODE	TYPE	POWER		OPERATING CURRENT [A]	DIMENSIONS mm			WEIGHT Kg	BOX
		kW	Hp		A-H	L-W	P-D		
SA692.00	RAIN PLUS 2 230	0,37÷2,2	0,5÷3	2x(2÷18)	285	245	140	2,4	03

THREE-PHASE 400Vac +15/-20% 50/60Hz

CODE	TYPE	POWER		OPERATING CURRENT [A]	DIMENSIONS mm			WEIGHT Kg	BOX
		kW	Hp		A-H	L-W	P-D		
SA695.02L	RAIN PLUS 2 400 10	0,37÷7,5	0,5÷10	2x(0,5÷16)	345	285	165	3,8	04
SA695.03L	RAIN PLUS 2 400 15	2,2÷11	3÷15	2x(4÷25)	380	300	150	5,3	05
SA695.04L	RAIN PLUS 2 400 20	7,5÷15	10÷20	2x(16÷32)	460	380	150	6,6	07

OPTIONALS

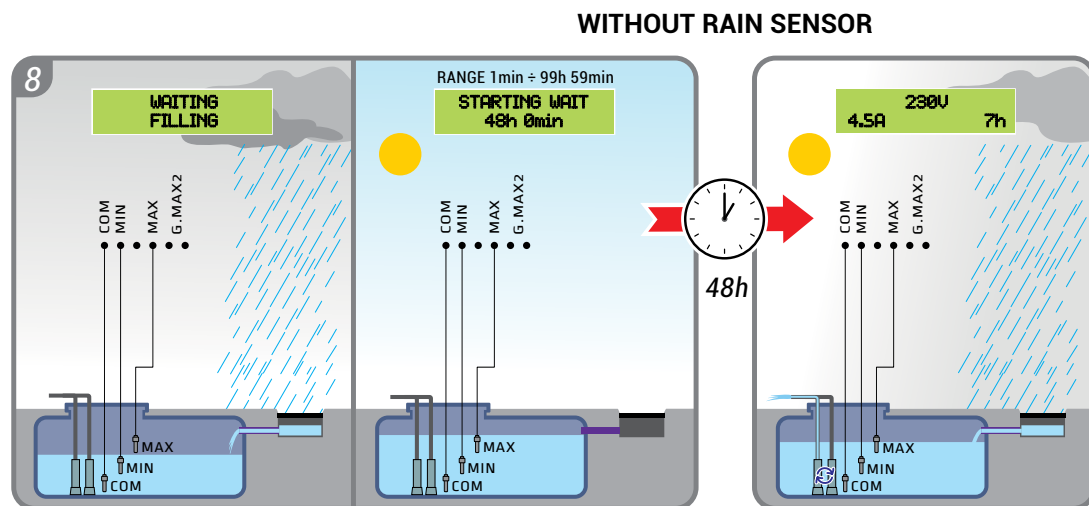
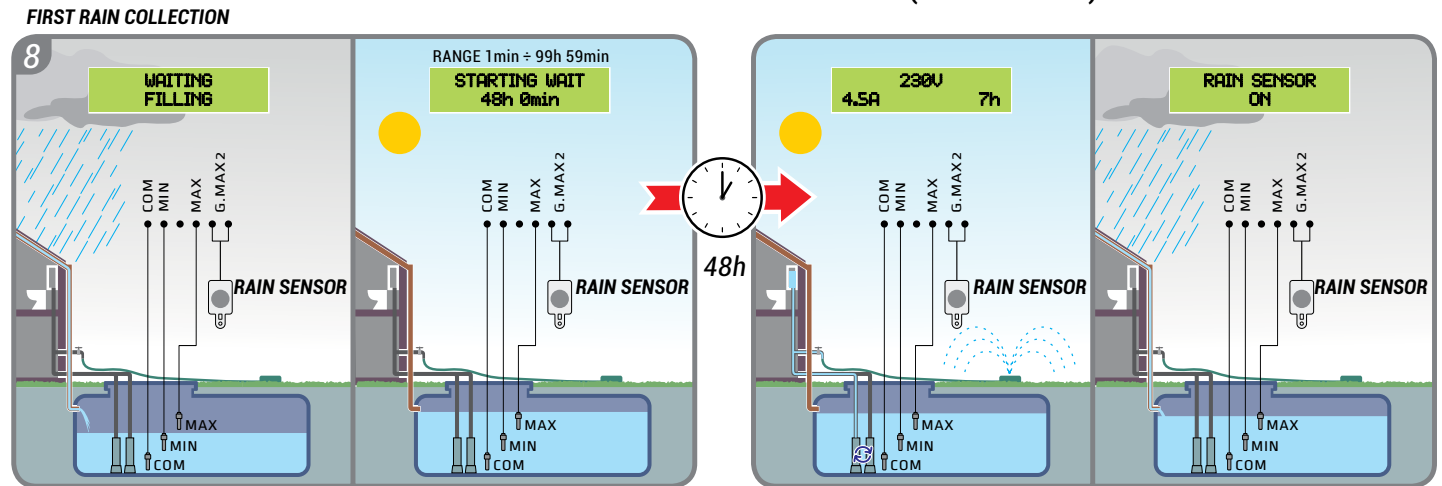
CODE	TYPE
OP100.29/B	On board GPRS expansion
OP100.59/B	On board Ethernet - WiFi expansion
OP101.00	Rain sensor con cavo 2m e staffa di fissaggio
OP100.05	Wired single-phase surge arrester type 2
OP100.05/1	Wired three-phase surge arrester type 2
OP200.00	Uscita allarme 12Vdc 200mA e contatto puro
OP100.13/1/12	Wired siren 12Vdc
OP100.13/2/12L	Wired flashing Led lamp 12Vdc
SS100.00	Visual and acoustic alarm indicator (BASIC ALARM VA 012) see page 20
SS101.01	Visual and acoustic alarm indicator with buffer battery (TOP ALARM VAB 230) see page 19
OP00.10	Couple of brackets for collar (reference BOX 03-04)

For more optionals see page 78



SPARE PARTS

CODE	TYPE
AC100.22/1/30	Display electronic board with flat cable 20pin 30cm
SD692.20	Single-phase RAIN PLUS 2 electronic board
SD695.20	Three-phase RAIN PLUS 2 electronic board 20A
SD695.30-40	Three-phase RAIN PLUS 2 electronic board 30-40A

CONTROL PANEL WITH OPTIONAL: OP101.00 (RAIN SENSOR)



COMPONENTS KEY

-  Rain sensor
-  Level probes

The addition of some optionals can imply changes on the size of the control panel. For further details please contact our technical/commercial department.