



Tipo Type Type	Motore Motors 2900 g/m Moteurs		Q = Portata - Capacity - Débit									
			l/sec	0	2,5	4,2	5,8	7,5	9,2	10,8	12,5	14,2
	Cv Hp	Kw	l/min	0	150	250	350	450	550	650	750	850
			mc/h	0	9	15	21	27	33	39	45	51
FB6RH/2 + 4B4	4	3	H(m)	31	30	29	27	25	21	16	10	3
FB6RH/3 + 6F5	5,5	4	47	44	42	40	37	32	24	15	4	
FB6RH/4 + 6F7	7,5	5,5	62	59	57	54	49	42	32	20	6	
FB6RH/5 + 6F10	10	7,5	78	75	70	67	62	53	40	25	7	
FB6RH/6 + 6F12	12,5	9,2	93	90	85	81	74	64	48	30	8	
FB6RH/8 + 6F15	15	11	124	119	114	108	99	85	65	40	11	
FB6RH/9 + 6F17	17,5	13	140	134	128	121	111	96	73	45	13	
FB6RH/10 + 6F20	20	15	155	148	143	135	124	106	81	50	14	
FB6RH/13 + 6F25	25	18,5	202	195	186	175	161	138	105	64	18	
FB6RH/16 + 6F30	30	22	248	238	229	216	198	170	129	79	22	
FB6RH/19 + 6F35	35	26	295	283	273	256	235	202	154	94	27	
FB6RH/22 + 6F40	40	30	341	326	316	296	272	234	178	109	31	
FB6RH/27D + 6F50*	50	37	419	401	388	364	334	287	218	134	38	
FB6RH/32D + 6F60*	60	45	496	476	458	431	396	340	259	158	45	

Dimensioni e pesi

Overall dimensions and weights - Dimensions d'encombrement et poids

Tipo Type Type	Cv Hp	Kw	A (mm)	B (mm)	C (mm)	D (mm)	ø max (mm)	DN	Peso - Weight - Poids				
									A (kg)	B (kg)	C (kg)		
FB6RH/2 + 4B4	4	3	913	408	505	94	140	145	145	G 3"	24	9	15
FB6RH/3 + 6F5	5,5	4	1065	468	597						54	10	44
FB6RH/4 + 6F7	7,5	5,5	1155	528	627						57	11	46
FB6RH/5 + 6F10	10	7,5	1255	588	667						61	11	50
FB6RH/6 + 6F12	12,5	9,2	1345	648	697						66	12	54
FB6RH/8 + 6F15	15	11	1535	768	767						75	14	61
FB6RH/9 + 6F17	17,5	13	1595	828	767						77	15	62
FB6RH/10 + 6F20	20	15	1715	888	827						84	16	68
FB6RH/13 + 6F25	25	18,5	1965	1068	897						94	19	75
FB6RH/16 + 6F30	30	22	2215	1248	967						104	22	82
FB6RH/19 + 6F35	35	26	2507	1480	1027						117	28	89
FB6RH/22 + 6F40	40	30	2827	1660	1167						134	31	103
FB6RH/27D + 6F50*	50	37	3256	1959	1297						157	41	116
FB6RH/32D + 6F60*	60	45	3724	2397	1327						174	53	121



* Non consigliata per montaggio in posizione orizzontale


* This electropump isn't recommended for horizontal assemblage

* Cette électropompe n'est pas recommandée pour le montage en position horizontale


CURVE DELLE PRESTAZIONI

PERFORMANCES' CURVES
COURBES DES PERFORMANCES

FB6RH



n=2900 1/min 50 Hz

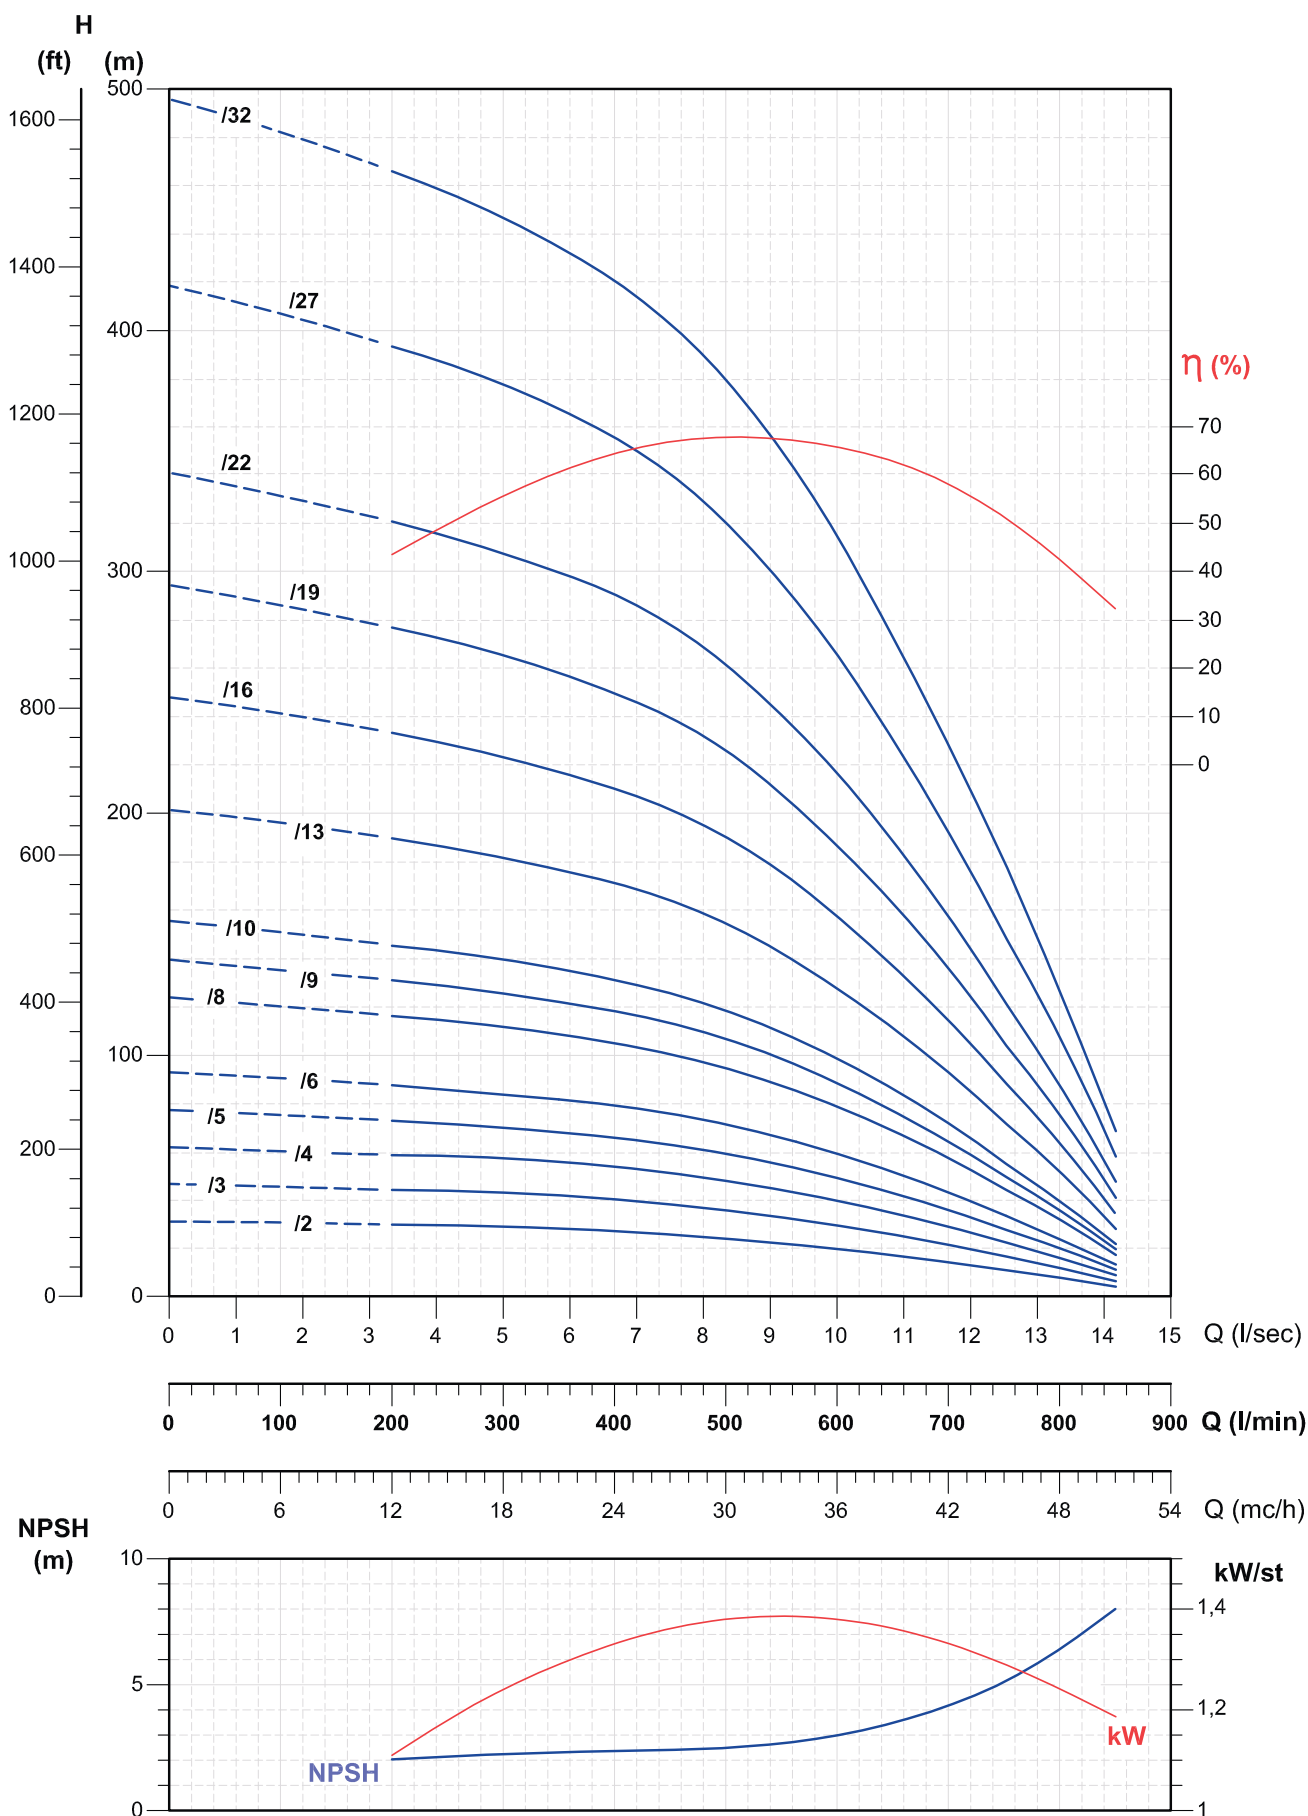

Tolleranze secondo EN ISO 9906 app.A Gr.2 - Tolerances according to EN ISO 9906 anx.A Gr.2 - Tolérances conformes EN ISO 9906 ann.A Gr.2