

Applications

The SPERONI SCRFED circulators for clean liquids, without abrasives, which are non-aggressive for the pump materials (contents of solids up to 0.2%).
 For heating, conditioning, cooling and circulation plants.
 For civil and industrial applications.
 When low noise operation is required.

Limits of application


- Liquid temperature from -10 °C to +120 °C
 (in short-time duty up to + 140 °C).
- Ambient temperature up to 40 °C.
- Maximum glycol quantity: 50%
 (Mixture with more than 20% glycol content require recheking of the pumping data).
- Maximum permissible working pressure 6/10 bar.



Motor

- 2/4 pole induction motor, 50Hz.
- Three adjustable speeds.
- SCRFED: single-phase 230V.
- Insulation class F.
- Protection IP 43.

Components

- Pump casing Cast iron
- Impeller Stainless steel
- Shaft Stainless steel

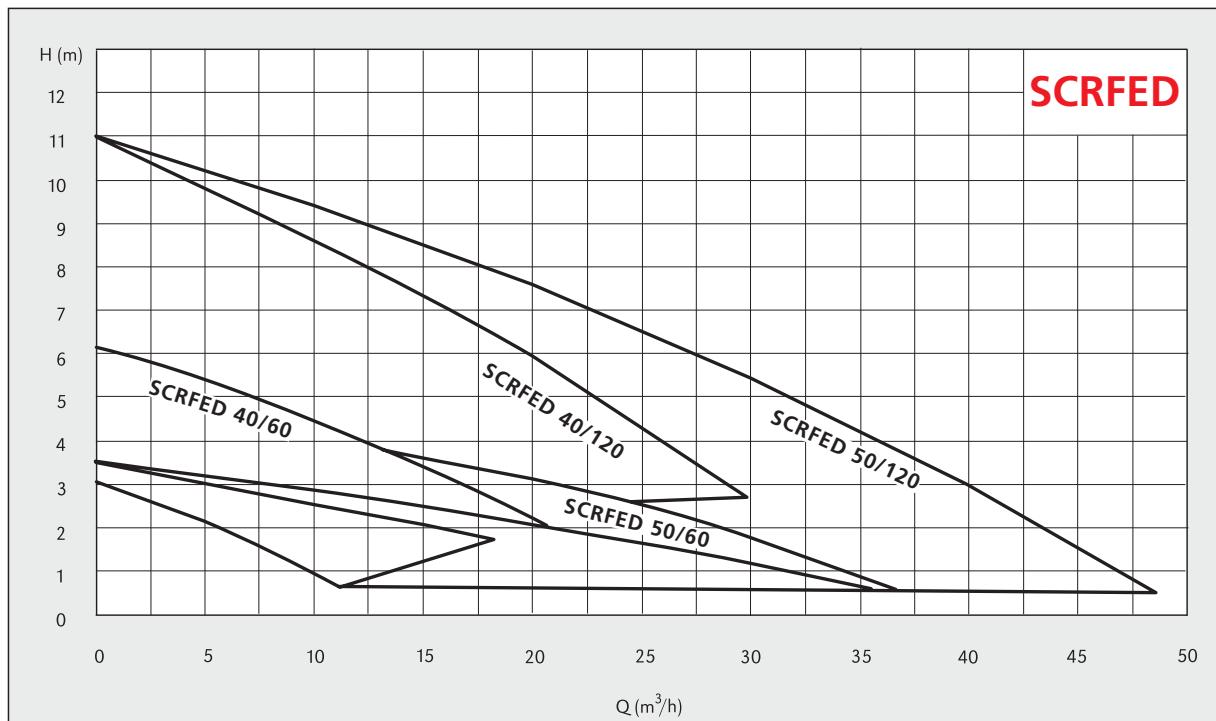

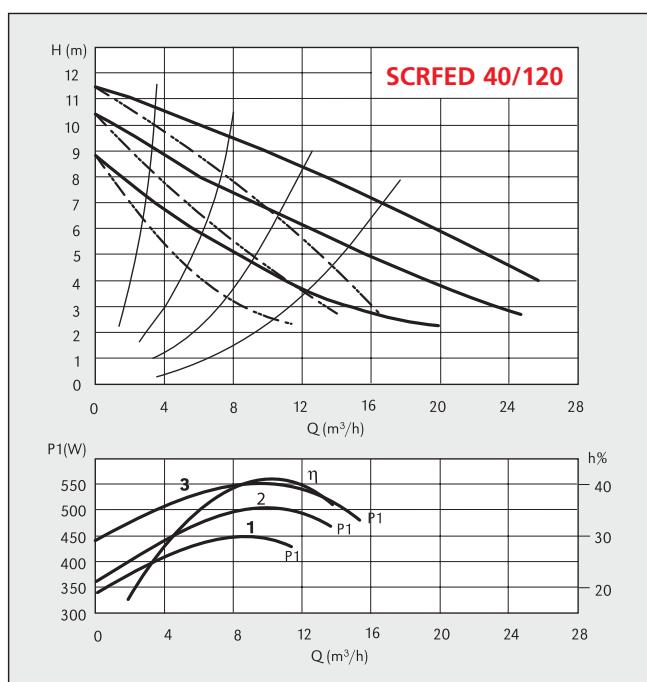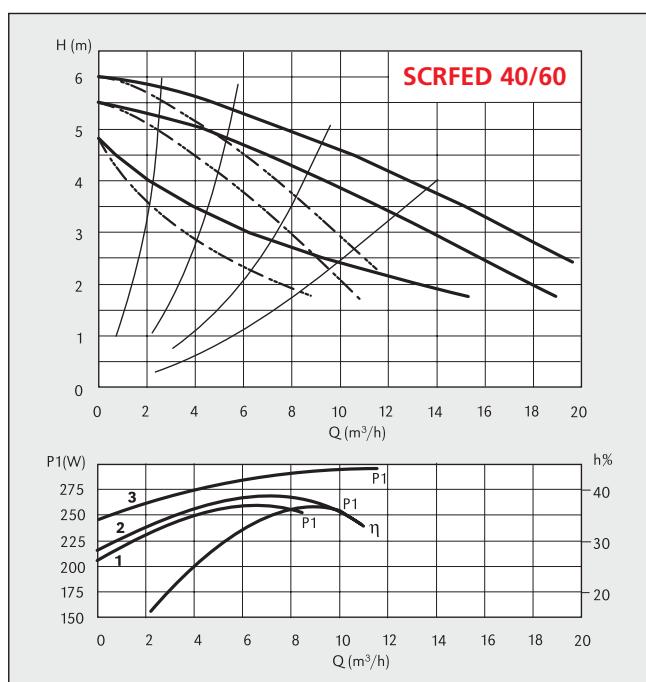

DIMENSIONS AND WEIGHTS



TYPE	DN	N° Pole 2 4	Pos.	1/min	P1 (W)	3x 400 V [A]	[kg]		
SCRFED 40-60/250	40	✓	3	2690	285	1,20	35,0		
			2	2360	245	1,18			
			1	1820	225	1,15			
SCRFED 40-120/250	40	✓	3	2755	550	2,35	35,0		
			2	2100	475	2,30			
			1	1270	355	1,85			

The technical drawing illustrates the physical dimensions of the pumps. Key dimensions shown are:

- Width: 346 mm
- Shaft diameter: R 1/4"
- Shaft height: 153 mm
- Shaft width: 62 mm
- Total height: 250 mm
- Shaft length: 110 mm
- Impeller diameter: 198 mm

SCRFED 50

SPERONI®
WATER PUMPS

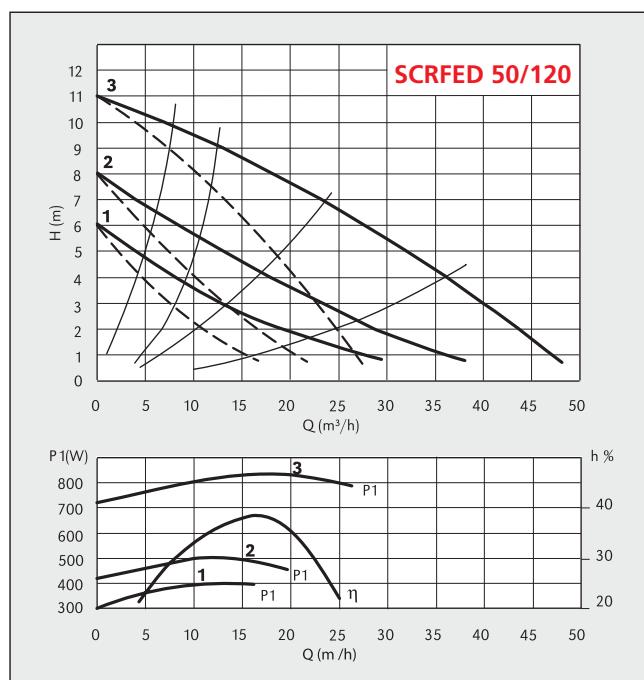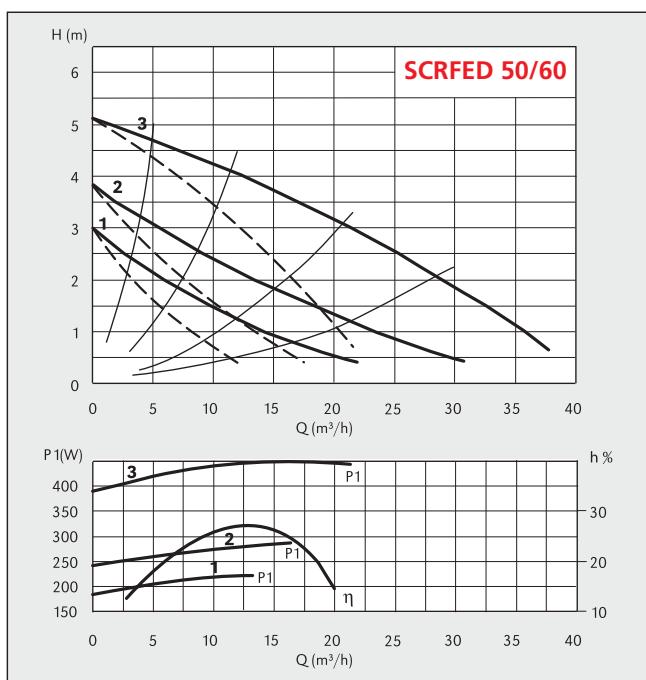

DIMENSIONS AND WEIGHTS

TYPE	DN	N° Pole 2 □ 4	Pos.	1/min	P1 (W)	3x 400 V [A]	[kg]		
SCRFED 50-60/280	50	✓	3	1260	415	1,8	44,0		
			2	1030	300	1,3			
			1	740	230	1,0			
SCRFED 50-120/280	50	✓	3	2720	830	3,6	44,0		
			2	1870	480	2,1			
			1	1450	390	1,7			